


**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW030 | MVF30 | RMI28 | MI30 |
|-----|-------|-------|-------|------|
| 5   | 18    |       |       |      |
| 7,5 | 18    | 16    | 15    | 16   |
| 10  | 18    | 16    | 17    | 18   |
| 15  | 18    | 18    | 18    | 18   |
| 20  | 18    | 18    | 15    | 18   |
| 25  | 21    |       |       | 20   |
| 30  | 20    | 20    | 19    | 22   |
| 40  | 18    | 19    | 16    | 20   |
| 50  | 17    |       | 15    | 19   |
| 60  | 16    | 19    | 15    | 17   |
| 80  | 13    | 13    | 12    | 12   |
| 100 |       |       | 10    | 7    |


**POTENZA IN ENTRATA (kW - 1400)**

| i   | SW030 | MVF30 | RMI28 | MI30 |
|-----|-------|-------|-------|------|
| 5   | 0,22  |       |       |      |
| 7,5 | 0,22  | 0,18  | 0,18  | 0,18 |
| 10  | 0,22  | 0,18  | 0,18  | 0,18 |
| 15  | 0,22  | 0,18  | 0,18  | 0,18 |
| 20  | 0,22  | 0,18  | 0,18  | 0,12 |
| 25  | 0,18  |       |       | 0,12 |
| 30  | 0,18  | 0,12  | 0,18  | 0,12 |
| 40  | 0,12  | 0,12  | 0,13  | 0,12 |
| 50  | 0,12  |       | 0,09  | 0,12 |
| 60  | 0,09  | 0,12  | 0,09  | 0,09 |
| 80  | 0,09  | 0,06  | 0,06  | 0,09 |
| 100 |       |       | 0,04  | 0,09 |

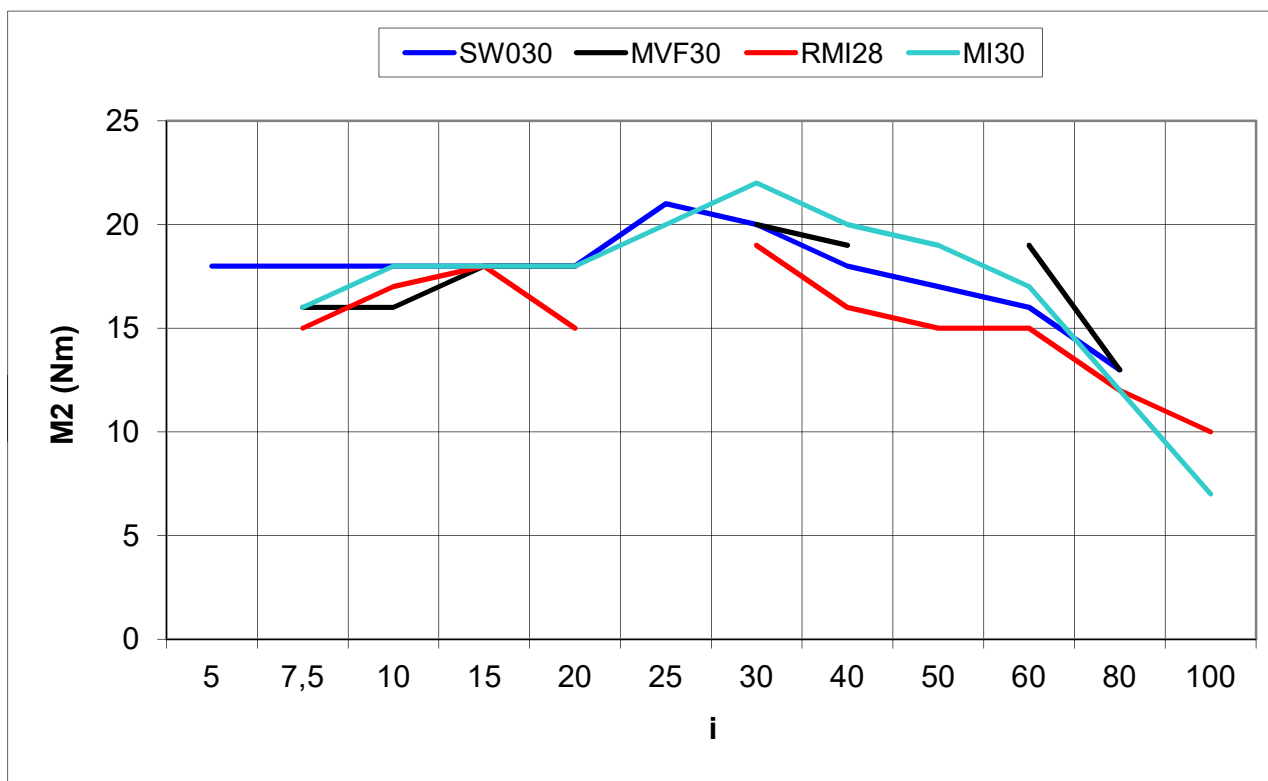

**CARATTERISTICHE**

|                  | SW030     | MVF30     | RMI28     | MI30      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 1830      | 1500      | 1430      | 1420      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | All       | All       | All       | All       |
| Peso (Kg)        | 1,2       | 1,1       | 1,4       |           |

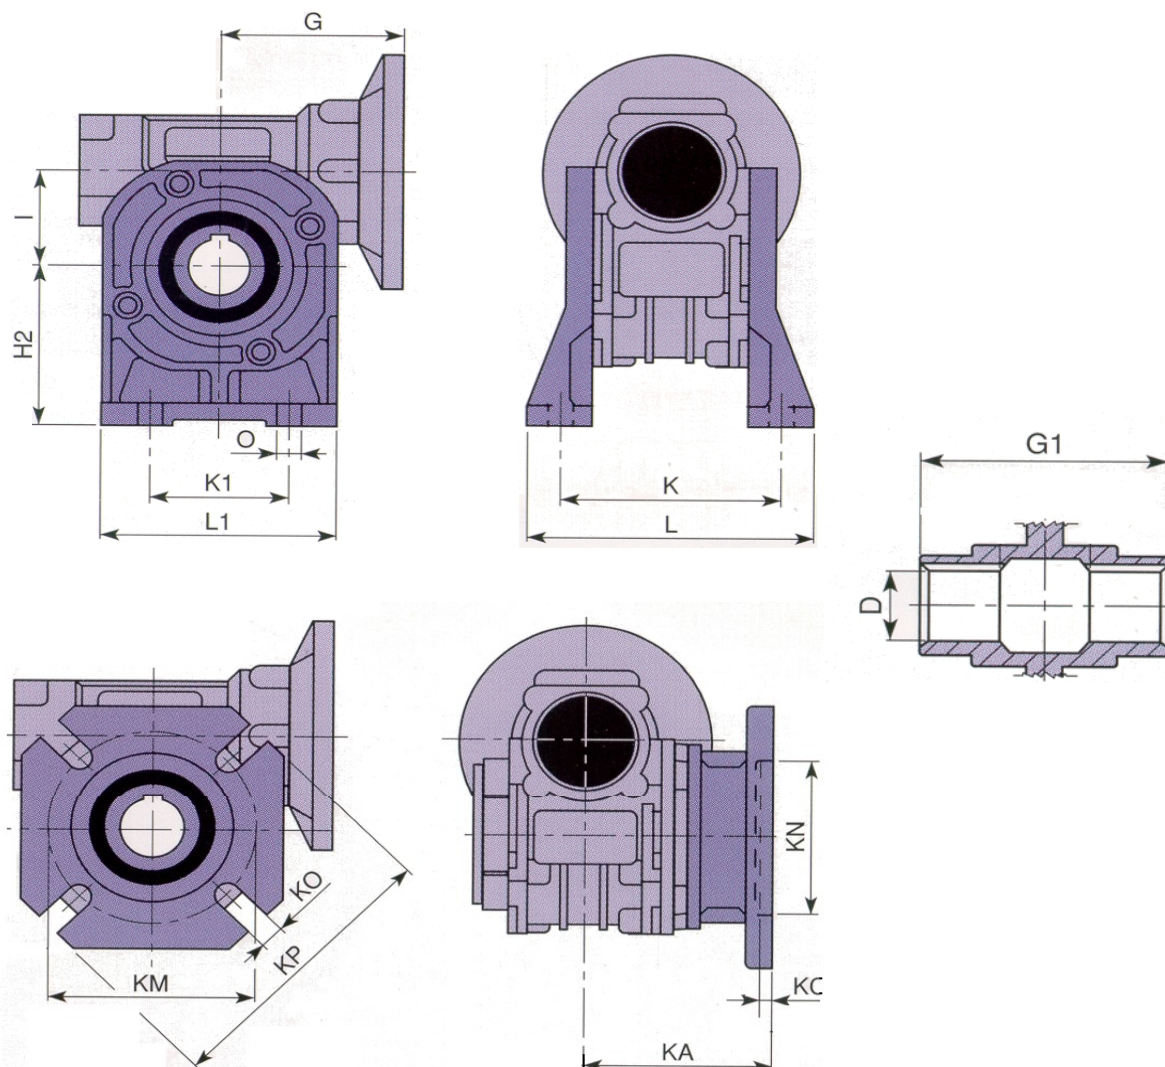**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

**DIMENSIONI**

|          | SW030    | MVF30 | RM128 | MI30 |      |      |
|----------|----------|-------|-------|------|------|------|
| I        | 30       | 30    | 28    | 30   |      |      |
| D        | 14       | 14    | 14    | 14   |      |      |
| G1       | 63       | 55    | 60    | 57   |      |      |
| G        | 55       | 52    | 49    | 53   |      |      |
| H2       | 55       | 55    | 52    | 42   |      |      |
| K        | 66       | 66    | 66    |      |      |      |
| K1       | 50(52)   | 50    | 52    | 52   |      |      |
| O        | 6.5(5.5) | 6,5   | 5,5   |      |      |      |
| L        | 80       | 80    | 78    | 55   |      |      |
| L1       | 80       | 80    | 67    | 84   |      |      |
| KA       | 54,5     | 50,5  | 49    | 53   | 72   | 51   |
| KN       | 50       | 50    | 40    | 50   | 50   | 50   |
| KM       | 68       | 68    | 56    | 62   | 68   | 68   |
| KP       | 80       | 80    | 70    | 80   | 80   | 80   |
| KO       | 6,5      | 6,5   | 6     | 6    | 6,5  | 6,5  |
| KC       | 4        | 6     | 5     | 4    | 4    | 4    |
| KA-1/2G1 | 23       | 23    | 19    | 23   | 43,5 | 22,5 |
|          | FA       |       | FL    | F2/2 | F    | FBC  |

PIEDE


FLANGIA

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW040 | MVF44 | RMI40 | MI40 |
|-----|-------|-------|-------|------|
| 5   | 34    |       |       |      |
| 7,5 | 40    | 29    | 37    | 28   |
| 10  | 40    | 29    | 42    | 29   |
| 15  | 40    | 29    | 42    | 32   |
| 20  | 39    | 39    | 37    | 38   |
| 25  | 38    |       |       | 36   |
| 30  | 45    | 39    | 43    | 41   |
| 40  | 41    | 39    | 40    | 40   |
| 50  | 39    | 39    | 38    | 40   |
| 60  | 36    | 39    | 36    | 38   |
| 80  | 33    | 29    | 26    | 30   |
| 100 | 29    | 28    | 28    | 28   |


**POTENZA IN ENTRATA (kW - 1400)**

| i   | SW040 | MVF44 | RMI40 | MI40 |
|-----|-------|-------|-------|------|
| 5   | 0,55  |       |       |      |
| 7,5 | 0,55  | 0,37  | 0,37  | 0,37 |
| 10  | 0,55  | 0,37  | 0,37  | 0,37 |
| 15  | 0,55  | 0,37  | 0,37  | 0,37 |
| 20  | 0,37  | 0,37  | 0,37  | 0,37 |
| 25  | 0,37  |       |       | 0,25 |
| 30  | 0,37  | 0,25  | 0,37  | 0,25 |
| 40  | 0,25  | 0,25  | 0,18  | 0,18 |
| 50  | 0,22  | 0,18  | 0,18  | 0,18 |
| 60  | 0,18  | 0,18  | 0,18  | 0,18 |
| 80  | 0,12  | 0,12  | 0,13  | 0,09 |
| 100 | 0,12  | 0,12  | 0,09  | 0,09 |

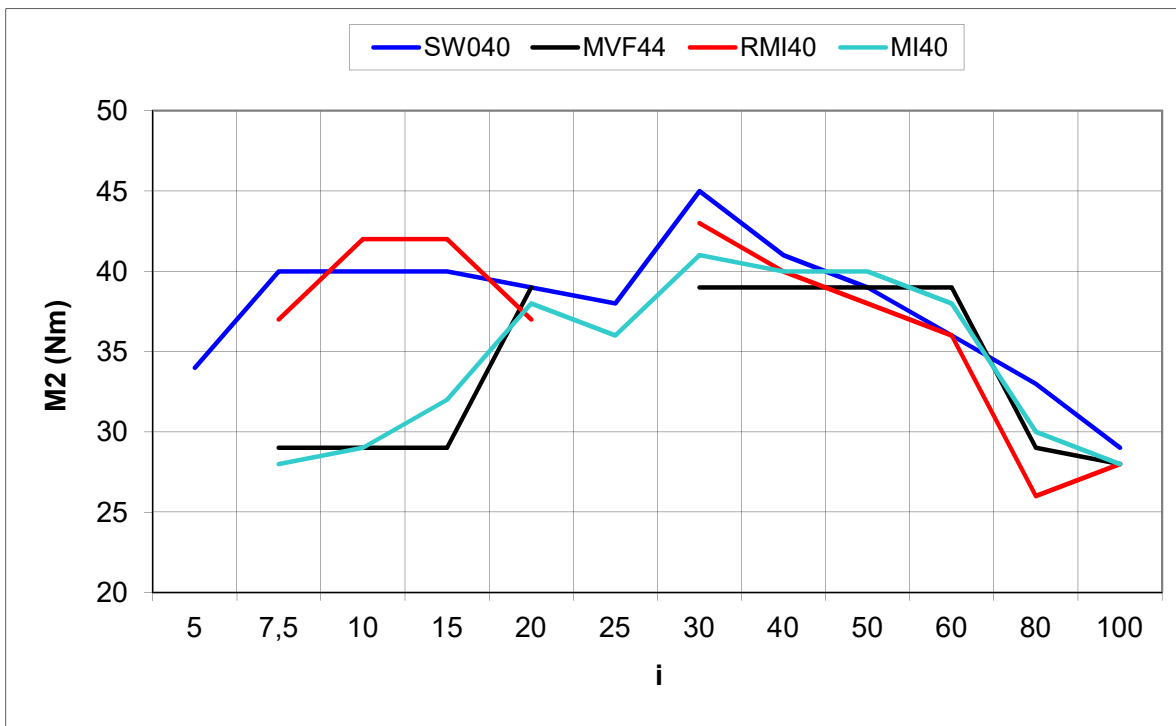

**CARATTERISTICHE**

|                  | SW040     | MVF44     | RMI40     | MI40      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 3490      | 2200      | 2300      | 2010      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | All       | All       | All       | All       |
| Peso (Kg)        | 2,3       | 2         | 2,1       |           |

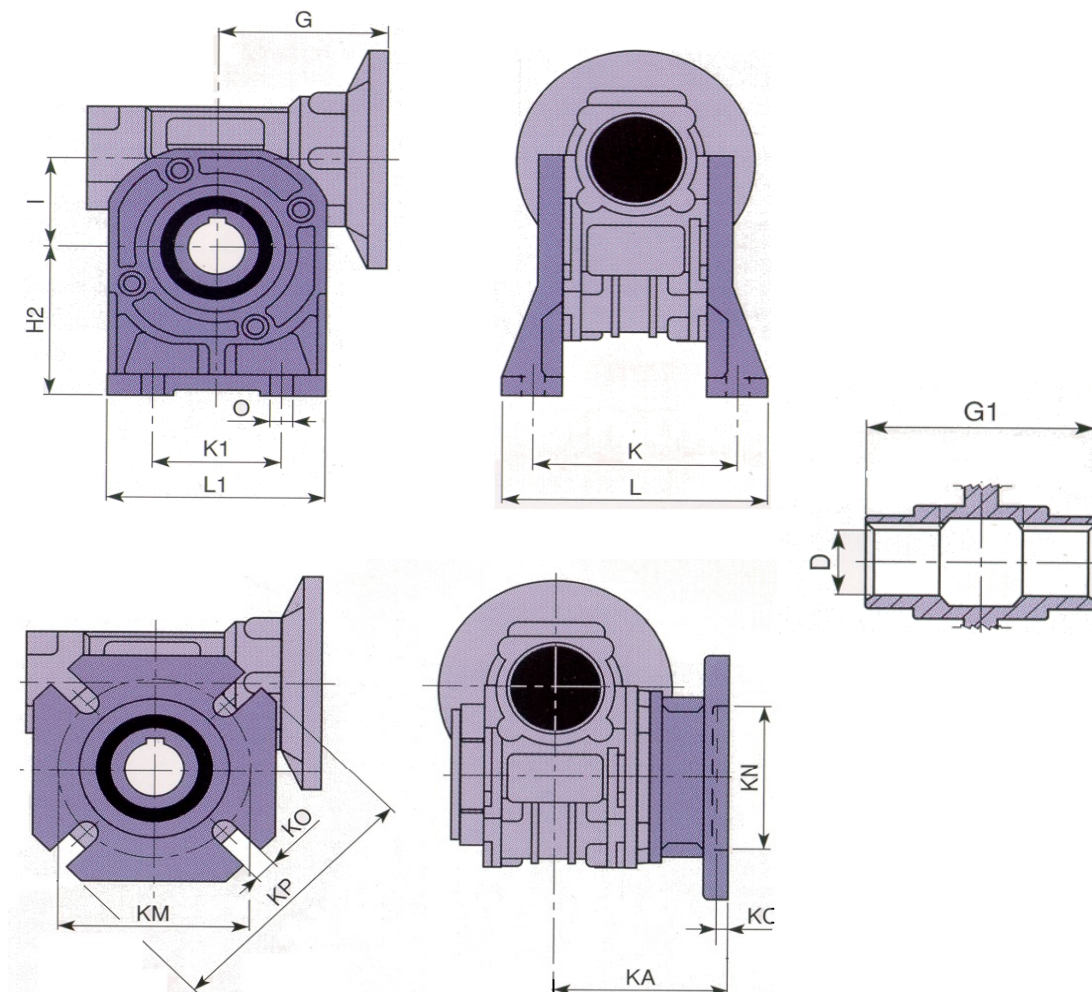**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI****DIMENSIONI**


|          | SW040  |     |     |     | MVF44 |     | RMI40  |     |     | MI40  |     |         |
|----------|--------|-----|-----|-----|-------|-----|--------|-----|-----|-------|-----|---------|
| I        | 40     |     |     |     | 44,6  |     | 40     |     |     | 40    |     | PIEDE   |
| D        | 18(19) |     |     |     | 18    |     | 18(19) |     |     | 18/19 |     |         |
| G1       | 78     |     |     |     | 64    |     | 82     |     |     | 82    |     |         |
| G        | 70     |     |     |     | 65    |     | 71     |     |     | 72    |     |         |
| H2       | 72     | 71  |     |     | 72    |     | 71     |     |     | 71    |     |         |
| K        | 81     | 84  |     |     | 81    |     | 84     |     |     | 84    |     |         |
| K1       | 52     | 70  |     |     | 52    |     | 70     |     |     | 70    |     |         |
| O        | 9      | 7   |     |     | 8,5   |     | 7      |     |     | 7     |     |         |
| L        | 98     | 100 |     |     | 98    |     | 102    |     |     | 100   |     |         |
| L1       | 90     | 96  |     |     | 90    |     | 100    |     |     | 96    |     |         |
| KA       | 67     | 97  | 80  | 58  | 60    | 90  | 82     | 69  | 62  | 82    | 60  | FLANGIA |
| KN       | 60     | 60  | 95  | 80  | 60    | 60  | 95     | 60  | 80  | 95    | 80  |         |
| KM       | 75     | 75  | 115 | 100 | 87    | 87  | 115    | 87  | 100 | 115   | 100 |         |
| KP       | 110    | 110 | 140 | 120 | 110   | 110 | 140    | 106 | 120 | 140   | 120 |         |
| KO       | 9      | 9   | 9,5 | 9   | 9     | 9   | 8,5    | 8,5 | 9   | 9     | 9   |         |
| KC       | 4      | 4   | 5   | 4   | 9     | 9   | 5      | 5   | 5   | 4     | 3   |         |
| KA-1/2G1 | 28     | 58  | 41  | 19  | 28    | 58  | 41     | 28  | 21  | 41    | 19  |         |
|          |        |     |     | NEW | F     | FA  | FL     | F1  | F2  | F     | FBR |         |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW050 | MVF49 | RMI50 | MI50 |
|-----|-------|-------|-------|------|
| 5   | 62    |       |       |      |
| 7,5 | 71    | 54    | 68    | 53   |
| 10  | 72    | 59    | 73    | 58   |
| 15  | 74    | 65    | 76    | 65   |
| 20  | 73    | 59    | 74    | 58   |
| 25  | 70    | 63    |       | 57   |
| 30  | 84    | 74    | 80    | 73   |
| 40  | 76    | 69    | 81    | 64   |
| 50  | 73    | 65    | 72    | 62   |
| 60  | 68    | 59    | 69    | 58   |
| 80  | 65    | 54    | 58    | 56   |
| 100 | 55    | 49    | 52    | 52   |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW050 | MVF49 | RMI50 | MI50 |
|-----|-------|-------|-------|------|
| 5   | 0,92  |       |       |      |
| 7,5 | 0,92  | 0,75  | 0,75  | 0,75 |
| 10  | 0,92  | 0,75  | 0,75  | 0,75 |
| 15  | 0,92  | 0,75  | 0,75  | 0,75 |
| 20  | 0,75  | 0,55  | 0,75  | 0,37 |
| 25  | 0,55  | 0,55  |       | 0,37 |
| 30  | 0,55  | 0,55  | 0,75  | 0,37 |
| 40  | 0,37  | 0,37  | 0,37  | 0,37 |
| 50  | 0,37  | 0,25  | 0,37  | 0,25 |
| 60  | 0,37  | 0,25  | 0,37  | 0,25 |
| 80  | 0,25  | 0,18  | 0,25  | 0,18 |
| 100 | 0,18  | 0,12  | 0,18  | 0,18 |

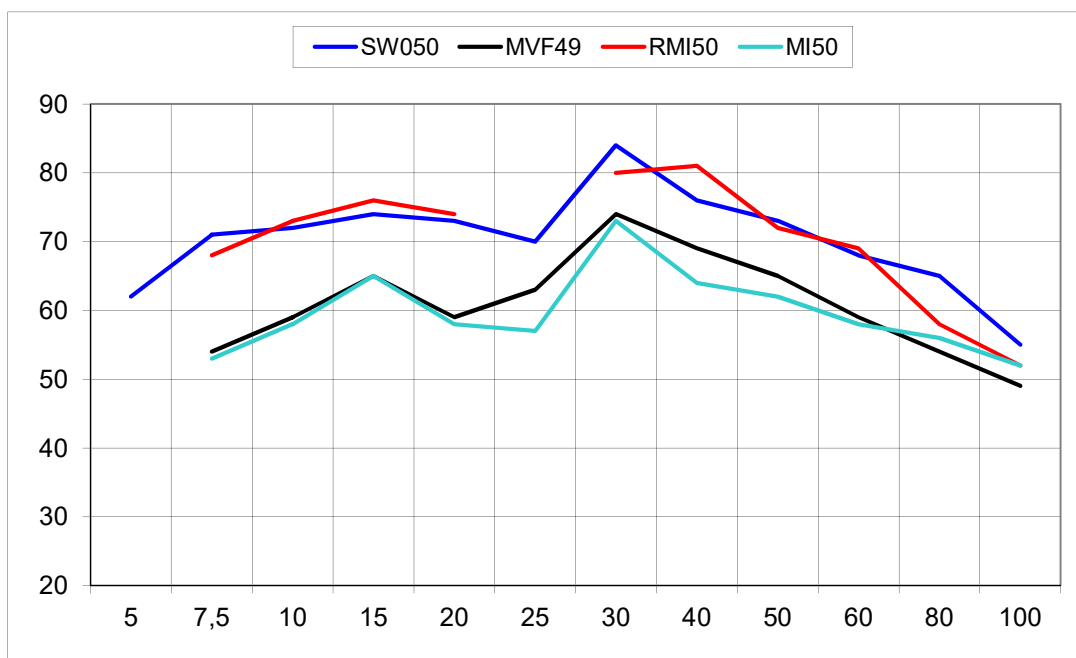

**CARATTERISTICHE**

|                  | SW050     | MVF49     | RMI50     | MI50      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 4840      | 3000      | 3200      | 2790      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | AlI       | AlI       | AlI       | AlI       |
| Peso (Kg)        | 3,5       | 3         | 3,8       |           |

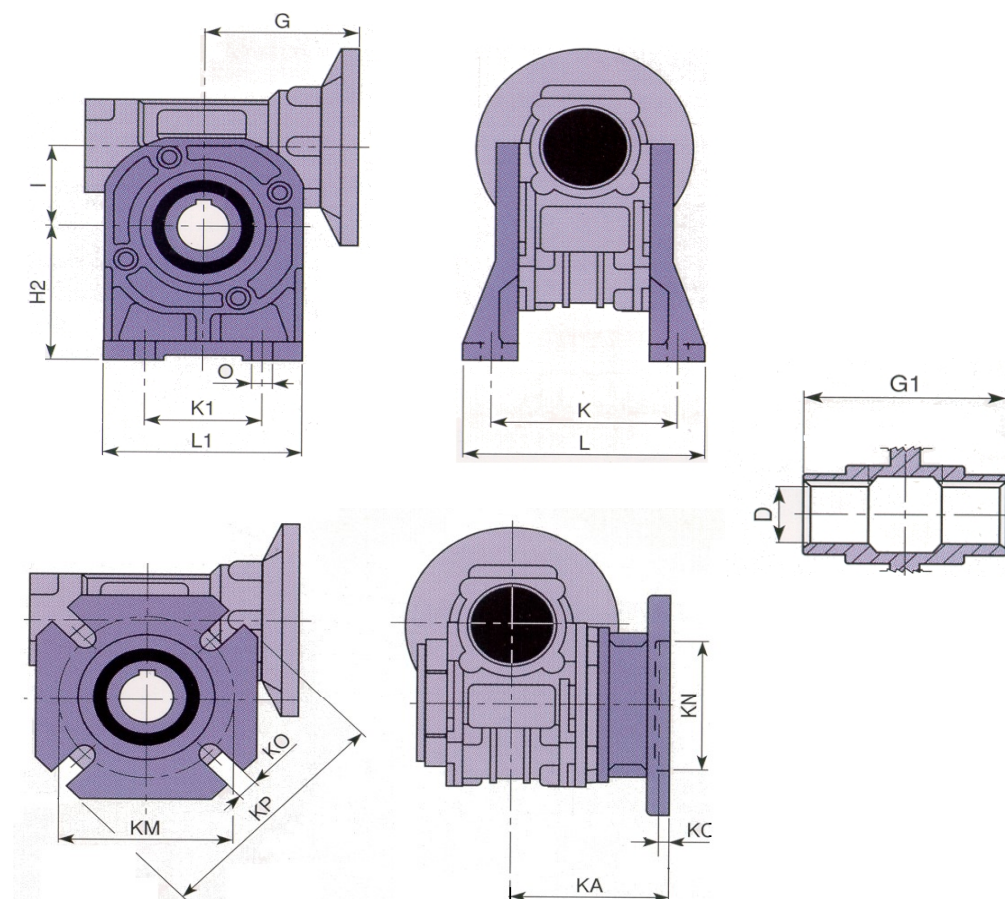

**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

**DIMENSIONI**


| SW050    |        |        |     | MVF49 |      | RMI50 |        |      |     | MI50 |       |     |
|----------|--------|--------|-----|-------|------|-------|--------|------|-----|------|-------|-----|
| I        | 50     |        |     |       | 49,5 |       | 50     |      |     |      | 50    |     |
| D        | 25(24) |        |     |       | 25   |       | 25(24) |      |     |      | 24/25 |     |
| G1       | 92     |        |     |       | 82   |       | 98     |      |     |      | 98    |     |
| G        | 80     |        |     |       | 70   |       | 81     |      |     |      | 81    |     |
| H2       | 82     | 85     |     |       | 82   |       | 85     |      |     |      | 85    |     |
| K        | 98,5   | 96(99) |     |       | 98,5 |       | 99     |      |     |      | 96    |     |
| K1       | 63     | 85     |     |       | 63   |       | 85     |      |     |      | 85    |     |
| O        | 9      | 9      |     |       | 8,5  |       | 9      |      |     |      | 9     |     |
| L        | 124    | 116    |     |       | 124  |       | 119    |      |     |      | 114   |     |
| L1       | 110    | 112    |     |       | 110  |       | 120    |      |     |      | 112   |     |
| KA       | 90     | 120    | 89  | 72    | 85   | 115   | 91,5   | 93   | 73  | 81   | 92    | 75  |
| KN       | 70     | 70     | 110 | 95    | 70   | 70    | 110    | 70   | 70  | 95   | 110   | 95  |
| KM       | 85     | 85     | 130 | 115   | 90   | 90    | 130    | 90   | 100 | 115  | 130   | 115 |
| KP       | 125    | 125    | 160 | 140   | 125  | 125   | 160    | 125  | 125 | 140  | 160   | 140 |
| KO       | 11     | 11     | 11  | 11    | 11   | 11    | 10     | 10,5 | 9   | 9    | 10    | 10  |
| KC       | 5      | 5      | 5   | 4     | 12   | 12    | 5      | 5    | 4   | 4    | 4     | 4   |
| KA-1/2G1 | 44     | 74     | 43  | 26    | 44   | 74    | 44,5   | 46   | 26  | 34   | 43    | 26  |
|          |        |        |     | Z     | F    | FA    | FL     | F1   | F2  | F3   | F     | FBR |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW063 | MVF63 | RMI63 | MI60 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 128   | 119   | 115   | 104  |
| 10  | 130   | 128   | 126   | 95   |
| 15  | 140   | 131   | 131   | 124  |
| 20  | 135   | 131   | 136   | 109  |
| 25  | 130   | 135   |       | 122  |
| 30  | 160   | 139   | 135   | 139  |
| 40  | 145   | 140   | 145   | 128  |
| 50  | 135   | 129   | 125   | 115  |
| 60  | 130   | 118   | 127   | 106  |
| 80  | 122   | 113   | 110   | 103  |
| 100 | 118   | 113   | 99    | 91   |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW063 | MVF63 | RMI63 | MI60 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 1,8   | 1,8   | 1,8   | 1,8  |
| 10  | 1,8   | 1,8   | 1,8   | 1,5  |
| 15  | 1,8   | 1,5   | 1,8   | 1,5  |
| 20  | 1,5   | 1,1   | 1,5   | 0,75 |
| 25  | 1,1   | 1,1   |       | 0,75 |
| 30  | 1,1   | 0,75  | 1,1   | 0,75 |
| 40  | 0,92  | 0,75  | 0,75  | 0,55 |
| 50  | 0,55  | 0,55  | 0,55  | 0,55 |
| 60  | 0,55  | 0,37  | 0,55  | 0,37 |
| 80  | 0,37  | 0,37  | 0,37  | 0,37 |
| 100 | 0,37  | 0,37  | 0,25  | 0,25 |

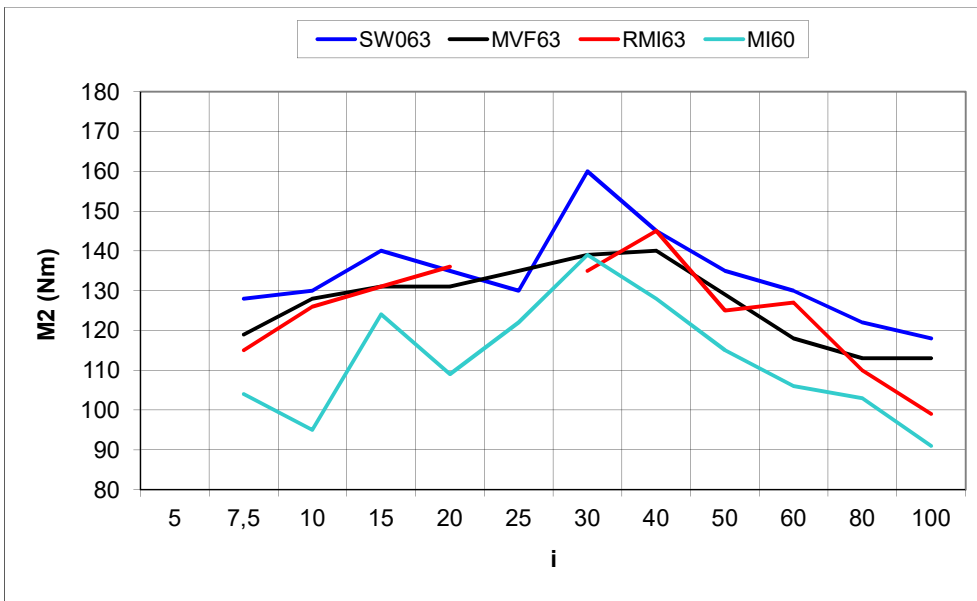

**CARATTERISTICHE**

|                  | SW063     | MVF63     | RMI63     | MI60      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 6270      | 4500      | 3300      | 3900      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | All       | All       | All       | All       |
| Peso (Kg)        | 6,2       | 6         | 6         |           |

MOTORIDUTTORI A VITE  
ST / BONFIGLIOLI / STM / SITI

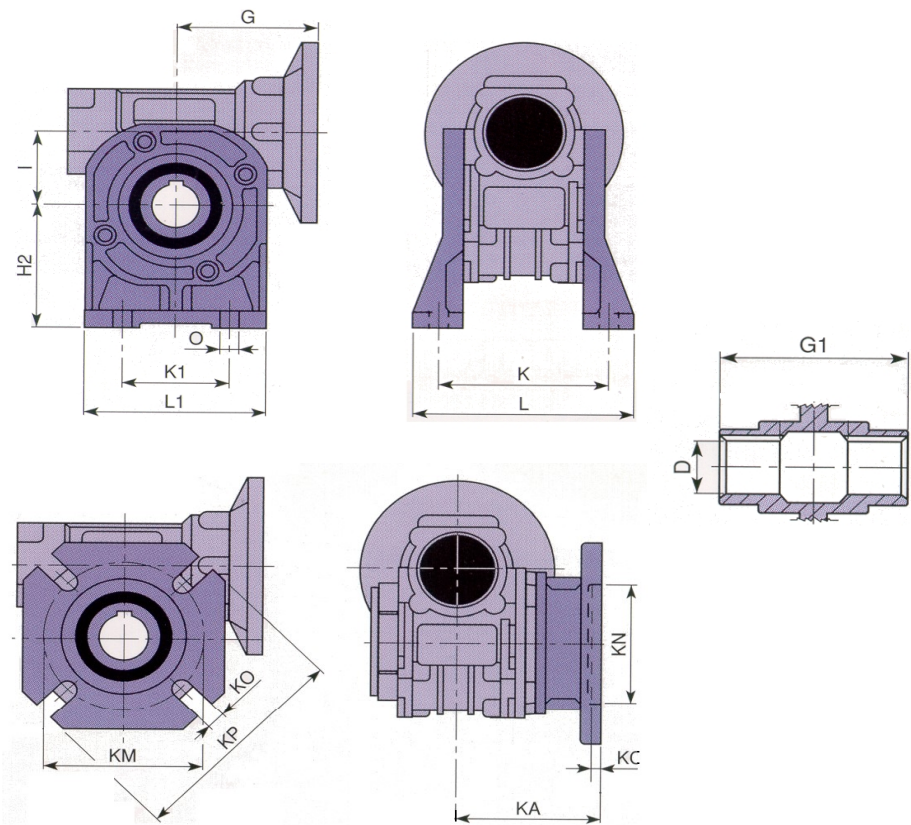

DIMENSIONI

|          | SW063  |     |     |     |      | MVF63 |     |     | RMI63 |     |     |     | MI60 |         |       |
|----------|--------|-----|-----|-----|------|-------|-----|-----|-------|-----|-----|-----|------|---------|-------|
| I        | 63     |     |     |     |      | 62,17 |     |     | 63    |     |     |     | 60   |         |       |
| D        | 25(28) |     |     |     |      | 25    |     |     | 25    |     |     |     | 25   |         |       |
| G1       | 112    |     |     |     |      | 120   |     |     | 120   |     |     |     | 120  |         |       |
| G        | 95     |     |     |     |      | 95    |     |     | 95    |     |     |     | 101  |         |       |
| H2       | 100    |     |     |     |      | 100   |     |     | 100   |     |     |     | 100  |         | PIEDE |
| K        | 111    |     |     |     |      | 111   |     |     | 111   |     |     |     | 111  |         |       |
| K1       | 95     |     |     |     |      | 95    |     |     | 95    |     |     |     | 95   |         |       |
| O        | 11     |     |     |     |      | 10,5  |     |     | 11    |     |     |     | 11   |         |       |
| L        | 138    |     |     |     |      | 143   |     |     | 136   |     |     |     | 137  |         |       |
| L1       | 140    |     |     |     |      | 140   |     |     | 140   |     |     |     | 140  |         |       |
| KA       | 82     | 112 | 98  | 107 | 80,5 | 86    | 116 | 116 | 86    | 102 | 82  | 102 | 82   | FLANGIA |       |
| KN       | 115    | 115 | 130 | 130 | 110  | 115   | 115 | 115 | 115   | 130 | 110 | 130 | 110  |         |       |
| KM       | 150    | 150 | 165 | 165 | 130  | 150   | 150 | 150 | 150   | 165 | 130 | 165 | 130  |         |       |
| KP       | 180    | 180 | 200 | 200 | 160  | 180   | 180 | 180 | 175   | 200 | 160 | 200 | 160  |         |       |
| KO       | 11     | 11  | 11  | 11  | 11   | 11    | 11  | 11  | 11    | 13  | 10  | 11  | 10   |         |       |
| KC       | 6      | 6   | 5   | 5   | 5    | 4     | 4   | 5   | 5     | 5   | 5   | 4   | 5    |         |       |
| KA-1/2G1 | 26     | 56  | 42  | 51  | 24,5 | 26    | 56  | 56  | 26    | 42  | 22  | 42  | 22   |         |       |
|          | NEW    |     |     |     |      | F     | FA  | FL  | F1    | F2  | F3  | F   | FBR  |         |       |




**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW063 | MVF63 | RMI70 | MI70 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 128   | 119   | 132   | 153  |
| 10  | 130   | 128   | 142   | 165  |
| 15  | 140   | 131   | 145   | 180  |
| 20  | 135   | 131   | 151   | 155  |
| 25  | 130   | 135   |       | 161  |
| 30  | 160   | 139   | 147   | 192  |
| 40  | 145   | 140   | 162   | 175  |
| 50  | 135   | 129   | 166   | 180  |
| 60  | 130   | 118   | 167   | 165  |
| 80  | 122   | 113   | 141   | 128  |
| 100 | 118   | 113   | 128   | 123  |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW063 | MVF63 | RMI70 | MI70 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 1,8   | 1,8   | 3     | 3    |
| 10  | 1,8   | 1,8   | 3     | 2,2  |
| 15  | 1,8   | 1,5   | 1,8   | 1,8  |
| 20  | 1,5   | 1,1   | 1,8   | 1,1  |
| 25  | 1,1   | 1,1   |       | 1,1  |
| 30  | 1,1   | 0,75  | 1,1   | 1,1  |
| 40  | 0,92  | 0,75  | 0,75  | 0,75 |
| 50  | 0,55  | 0,55  | 0,75  | 0,75 |
| 60  | 0,55  | 0,37  | 0,75  | 0,55 |
| 80  | 0,37  | 0,37  | 0,55  | 0,55 |
| 100 | 0,37  | 0,37  | 0,37  | 0,37 |

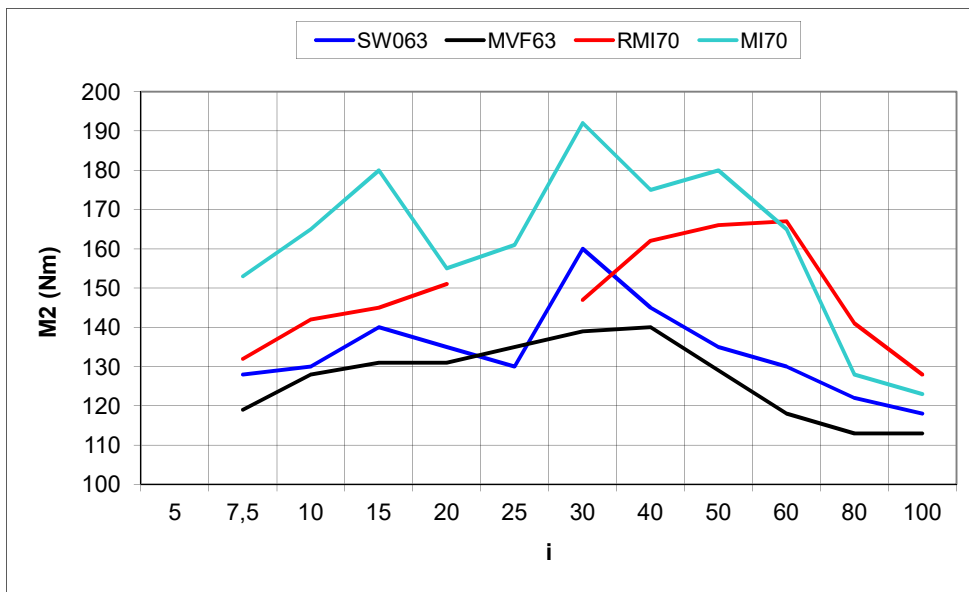

**CARATTERISTICHE**

|                  | SW063     | MVF63     | RMI70     | MI70      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 6270      | 4500      | 4700      | 4970      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | All       | All       | All       | All       |
| Peso (Kg)        | 6,2       | 6         | 7,5       |           |

**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

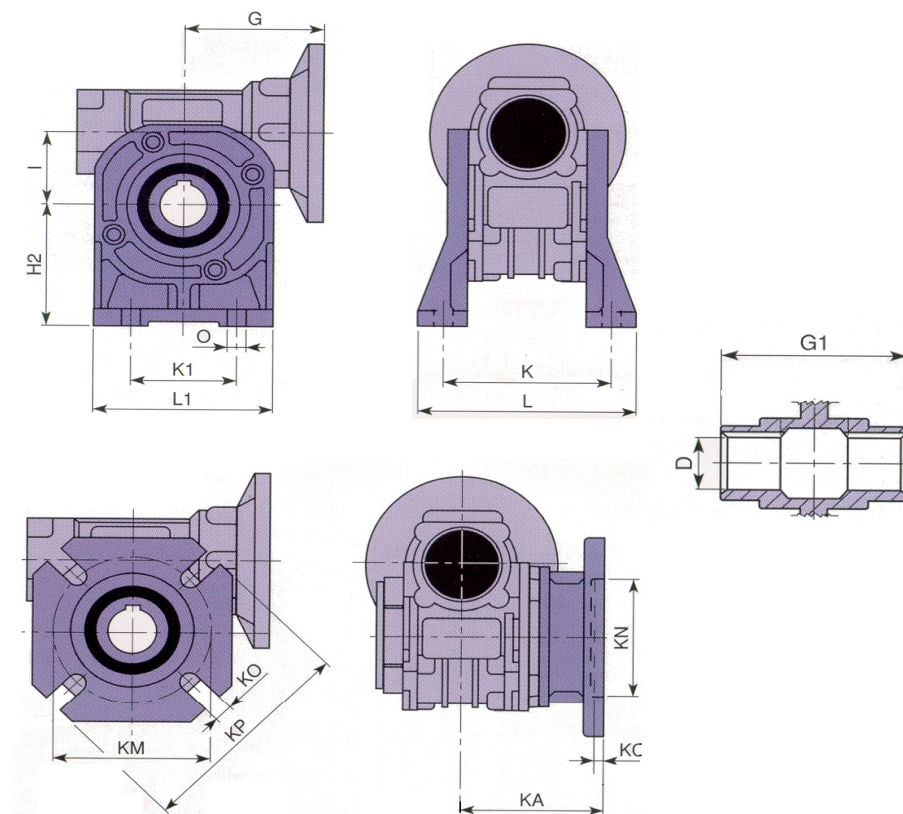

**DIMENSIONI**


| SW063    |        |     |     |     |      |       |     |     |     |     |     |       |       |         | MVF63 |    |    | RMI70 |    |    |   |     | MI70 |  | PIEDE |
|----------|--------|-----|-----|-----|------|-------|-----|-----|-----|-----|-----|-------|-------|---------|-------|----|----|-------|----|----|---|-----|------|--|-------|
| I        | 63     |     |     |     |      | 62,17 |     | 70  |     |     |     |       | 70    |         |       |    |    |       |    |    |   |     |      |  |       |
| D        | 25(28) |     |     |     |      | 25    |     | 28  |     |     |     |       | 28    |         |       |    |    |       |    |    |   |     |      |  |       |
| G1       | 112    |     |     |     |      | 120   |     | 120 |     |     |     |       | 121   |         |       |    |    |       |    |    |   |     |      |  |       |
| G        | 95     |     |     |     |      | 95    |     | 100 |     |     |     |       | 108,5 |         |       |    |    |       |    |    |   |     |      |  |       |
| H2       | 100    |     |     |     |      | 100   |     | 115 |     |     |     |       | 115   |         |       |    |    |       |    |    |   |     |      |  |       |
| K        | 111    |     |     |     |      | 111   |     | 116 |     |     |     |       | 115   |         |       |    |    |       |    |    |   |     |      |  |       |
| K1       | 95     |     |     |     |      | 95    |     | 120 |     |     |     |       | 120   |         |       |    |    |       |    |    |   |     |      |  |       |
| O        | 11     |     |     |     |      | 10,5  |     | 11  |     |     |     |       | 11    |         |       |    |    |       |    |    |   |     |      |  |       |
| L        | 138    |     |     |     |      | 143   |     | 140 |     |     |     |       | 141   |         |       |    |    |       |    |    |   |     |      |  |       |
| L1       | 140    |     |     |     |      | 140   |     | 158 |     |     |     |       | 156   |         |       |    |    |       |    |    |   |     |      |  |       |
| KA       | 82     | 112 | 98  | 107 | 80,5 | 86    | 116 | 111 | 116 | 85  | 101 | 111,5 | 85    | FLANGIA |       |    |    |       |    |    |   |     |      |  |       |
| KN       | 115    | 115 | 130 | 130 | 110  | 115   | 115 | 130 | 115 | 115 | 110 | 130   | 110   |         |       |    |    |       |    |    |   |     |      |  |       |
| KM       | 150    | 150 | 165 | 165 | 130  | 150   | 150 | 165 | 150 | 150 | 130 | 165   | 130   |         |       |    |    |       |    |    |   |     |      |  |       |
| KP       | 180    | 180 | 200 | 200 | 160  | 180   | 180 | 200 | 175 | 175 | 160 | 200   | 160   |         |       |    |    |       |    |    |   |     |      |  |       |
| KO       | 11     | 11  | 11  | 11  | 11   | 11    | 11  | 13  | 11  | 11  | 11  | 11    | 11    |         |       |    |    |       |    |    |   |     |      |  |       |
| KC       | 6      | 6   | 5   | 5   | 5    | 4     | 4   | 5   | 5   | 5   | 6   | 5     | 5     | FLANGIA |       |    |    |       |    |    |   |     |      |  |       |
| KA-1/2G1 | 26     | 56  | 42  | 51  | 24,5 | 26    | 56  | 51  | 56  | 25  | 41  | 51    | 24,5  |         |       |    |    |       |    |    |   |     |      |  |       |
| N        |        |     |     |     |      |       |     |     |     |     |     |       |       |         | F     | FA | FL | F1    | F2 | F3 | F | FBR |      |  |       |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW075 | MVF72 | RMI70 | MI70 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 185   | 170   | 132   | 153  |
| 10  | 195   | 190   | 142   | 165  |
| 15  | 200   | 190   | 145   | 180  |
| 20  | 210   | 190   | 151   | 155  |
| 25  | 200   | 190   |       | 161  |
| 30  | 230   | 200   | 147   | 192  |
| 40  | 220   | 190   | 162   | 175  |
| 50  | 210   | 170   | 166   | 180  |
| 60  | 200   | 160   | 167   | 165  |
| 80  | 190   | 150   | 141   | 128  |
| 100 | 180   | 130   | 128   | 123  |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW075 | MVF72 | RMI70 | MI70 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 4     | 3     | 3     | 3    |
| 10  | 4     | 3     | 3     | 2,2  |
| 15  | 3     | 2,2   | 1,8   | 1,8  |
| 20  | 1,8   | 1,5   | 1,8   | 1,1  |
| 25  | 1,8   | 1,5   |       | 1,1  |
| 30  | 1,8   | 1,1   | 1,1   | 1,1  |
| 40  | 1,1   | 1,1   | 0,75  | 0,75 |
| 50  | 0,92  | 0,75  | 0,75  | 0,75 |
| 60  | 0,92  | 0,55  | 0,75  | 0,55 |
| 80  | 0,55  | 0,55  | 0,55  | 0,55 |
| 100 | 0,55  | 0,37  | 0,37  | 0,37 |

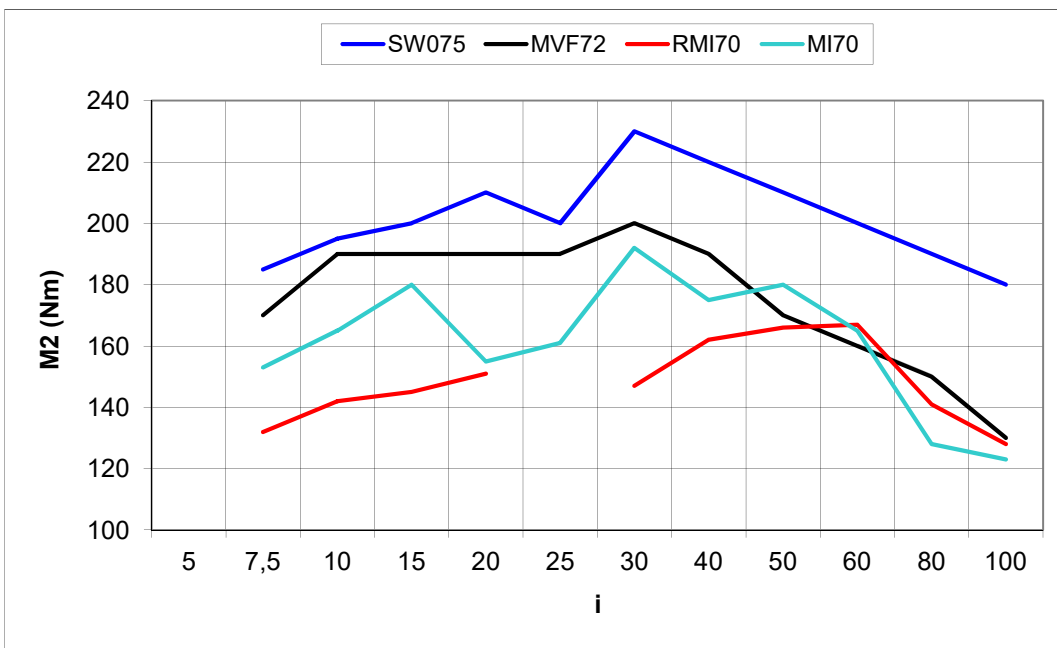

**CARATTERISTICHE**

|                  | SW075     | MVF72     | RMI70     | MI70      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 7380      | 5000      | 4700      | 4970      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | AlI       | AlI       | AlI       | AlI       |
| Peso (Kg)        | 9         | 8,2       | 7,5       |           |

# MOTORIDUTTORI A VITE ST / BONFIGLIOLI / STM / SITI

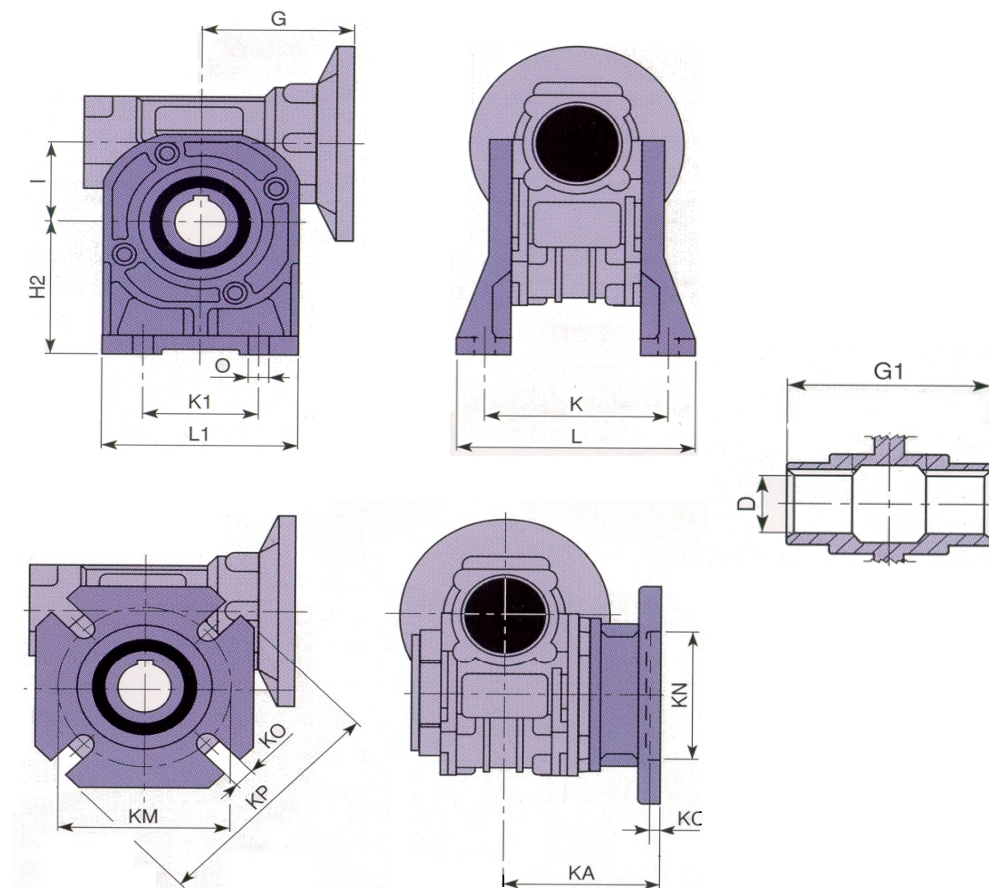

## DIMENSIONI


|          | SW075    |     | MVF72  |     | RMI70 |     |     |     | MI70  |      |         |
|----------|----------|-----|--------|-----|-------|-----|-----|-----|-------|------|---------|
| I        | 75       |     | 72     |     | 70    |     |     |     | 70    |      | PIEDE   |
| D        | 28(35)   |     | 28(30) |     | 28    |     |     |     | 28    |      |         |
| G1       | 120      |     | 120    |     | 120   |     |     |     | 121   |      |         |
| G        | 112,5    |     | 116    |     | 100   |     |     |     | 108,5 |      |         |
| H2       | 115      |     | 115    |     | 115   |     |     |     | 115   |      |         |
| K        | 115(116) |     | 116    |     | 116   |     |     |     | 115   |      |         |
| K1       | 120      |     | 120    |     | 120   |     |     |     | 120   |      |         |
| O        | 11       |     | 13     |     | 11    |     |     |     | 11    |      |         |
| L        | 142      |     | 142    |     | 140   |     |     |     | 141   |      | FLANGIA |
| L1       | 160      |     | 156    |     | 158   |     |     |     | 156   |      |         |
| KA       | 111      | 90  | 111    | 85  | 111   | 116 | 85  | 101 | 111,5 | 85   |         |
| KN       | 130      | 110 | 130    | 130 | 130   | 115 | 115 | 110 | 130   | 110  |         |
| KM       | 165      | 130 | 165    | 165 | 165   | 150 | 150 | 130 | 165   | 130  |         |
| KP       | 200      | 160 | 200    | 200 | 200   | 175 | 175 | 160 | 200   | 160  |         |
| KO       | 14       | 11  | 14     | 14  | 13    | 11  | 11  | 11  | 11    | 11   |         |
| KC       | 6        | 6   | 5      | 5   | 5     | 5   | 5   | 6   | 5     | 5    |         |
| KA-1/2G1 | 51       | 30  | 51     | 25  | 51    | 56  | 25  | 41  | 51    | 24,5 |         |
|          | NEW      |     | FA     | F   | FL    | F1  | F2  | F3  | F     | FBR  |         |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW075 | MVF72 | RMI85 | MI80 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 185   | 170   | 247   | 195  |
| 10  | 195   | 190   | 280   | 174  |
| 15  | 200   | 190   | 282   | 253  |
| 20  | 210   | 190   | 310   | 231  |
| 25  | 200   | 190   |       | 220  |
| 30  | 230   | 200   | 275   | 286  |
| 40  | 220   | 190   | 312   | 264  |
| 50  | 210   | 170   | 287   | 224  |
| 60  | 200   | 160   | 283   | 220  |
| 80  | 190   | 150   | 243   | 214  |
| 100 | 180   | 130   | 217   | 189  |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW075 | MVF72 | RMI85 | MI80 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 4     | 3     | 4     | 3    |
| 10  | 4     | 3     | 4     | 3    |
| 15  | 3     | 2,2   | 4     | 3    |
| 20  | 1,8   | 1,5   | 3     | 2,2  |
| 25  | 1,8   | 1,5   |       | 1,5  |
| 30  | 1,8   | 1,1   | 2,2   | 1,8  |
| 40  | 1,1   | 1,1   | 1,8   | 1,1  |
| 50  | 0,92  | 0,75  | 1,5   | 0,75 |
| 60  | 0,92  | 0,55  | 1,1   | 0,75 |
| 80  | 0,55  | 0,55  | 0,75  | 0,75 |
| 100 | 0,55  | 0,37  | 0,75  | 0,55 |

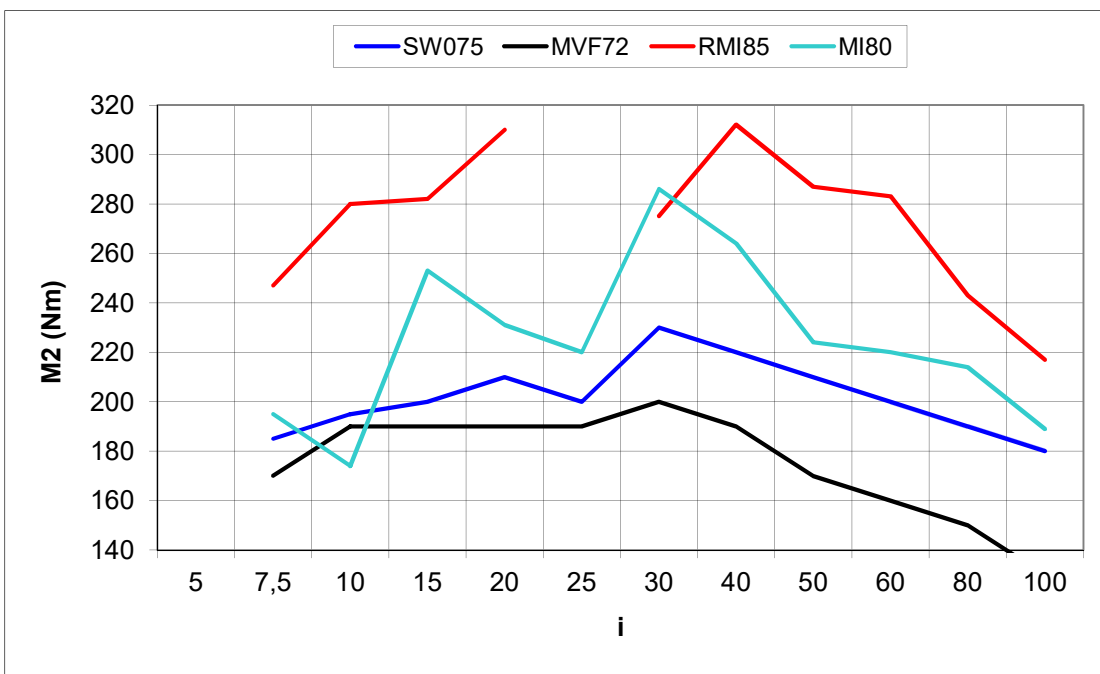

**CARATTERISTICHE**

|                  | SW075     | MVF72     | RMI85     | MI80      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 7380      | 5000      | 5800      | 5920      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | All       | All       | G         | G         |
| Peso (Kg)        | 9         | 8,2       | 19        |           |

**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

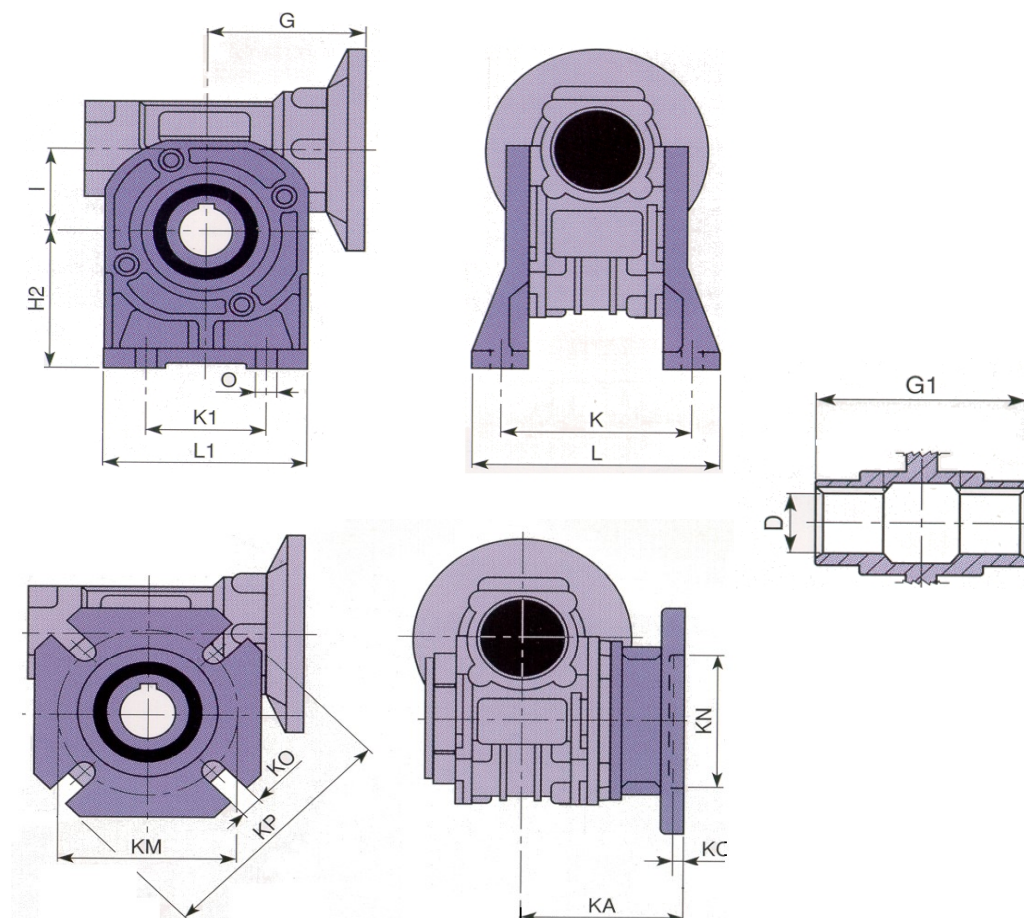

**DIMENSIONI**

|          |  | SW075    |     | MV72   |     | RMI85  |     |     |      | MI80 |      |         |
|----------|--|----------|-----|--------|-----|--------|-----|-----|------|------|------|---------|
| I        |  | 75       |     | 72     |     | 85     |     |     |      | 80   |      | PIEDE   |
| D        |  | 28(35)   |     | 28(30) |     | 35(32) |     |     |      | 35   |      |         |
| G1       |  | 120      |     | 120    |     | 122    |     |     |      | 140  |      |         |
| G        |  | 112,5    |     | 116    |     | 118    |     |     |      | 108  |      |         |
| H2       |  | 115      |     | 115    |     | 135    |     |     |      | 142  |      |         |
| K        |  | 115(116) |     | 116    |     | 140    |     |     |      | 147  |      |         |
| K1       |  | 120      |     | 120    |     | 140    |     |     |      | 140  |      |         |
| O        |  | 11       |     | 13     |     | 13     |     |     |      | 11   |      |         |
| L        |  | 142      |     | 142    |     | 168    |     |     |      | 181  |      | FLANGIA |
| L1       |  | 160      |     | 156    |     | 193    |     |     |      | 180  |      |         |
| KA       |  | 111      | 90  | 111    | 85  | 100    | 141 | 120 | 91   | 120  | 100  |         |
| KN       |  | 130      | 110 | 130    | 130 | 130    | 130 | 152 | 110  | 130  | 110  |         |
| KM       |  | 165      | 130 | 165    | 165 | 165    | 165 | 176 | 130  | 165  | 130  |         |
| KP       |  | 200      | 160 | 200    | 200 | 200    | 200 | 210 | 160  | 200  | 160  |         |
| KO       |  | 14       | 11  | 14     | 14  | 13     | 13  | 13  | 11,5 | 11,5 | 11,5 |         |
| KC       |  | 6        | 6   | 5      | 5   | 5      | 6   | 5   | 5    | 5    | 5    |         |
| KA-1/2G1 |  | 51       | 30  | 51     | 25  | 39     | 80  | 59  | 30   | 50   | 30   |         |
|          |  | NEW      |     | FA     | F   | FL     | F1  | F2  | F3   | F    | FBR  |         |




**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW090 | MVF86 | RMI85 | MI90 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 290   | 245   | 247   | 253  |
| 10  | 310   | 270   | 280   | 231  |
| 15  | 360   | 290   | 282   | 352  |
| 20  | 355   | 280   | 310   | 330  |
| 25  | 340   | 280   |       | 320  |
| 30  | 410   | 330   | 275   | 385  |
| 40  | 360   | 320   | 312   | 360  |
| 50  | 340   | 310   | 287   | 345  |
| 60  | 320   | 275   | 283   | 330  |
| 80  | 285   | 255   | 243   | 275  |
| 100 | 270   | 230   | 217   | 255  |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW090 | MVF86 | RMI85 | MI90 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 4,8   | 4     | 4     | 4    |
| 10  | 4,8   | 4     | 4     | 4    |
| 15  | 4,8   | 3     | 4     | 4    |
| 20  | 4     | 2,2   | 3     | 3    |
| 25  | 3     | 2,2   |       | 2,2  |
| 30  | 3     | 2,2   | 2,2   | 2,2  |
| 40  | 1,8   | 1,5   | 1,8   | 1,8  |
| 50  | 1,8   | 1,5   | 1,5   | 1,5  |
| 60  | 1,5   | 1,1   | 1,1   | 1,1  |
| 80  | 0,92  | 0,75  | 0,75  | 0,75 |
| 100 | 0,75  | 0,55  | 0,75  | 0,75 |

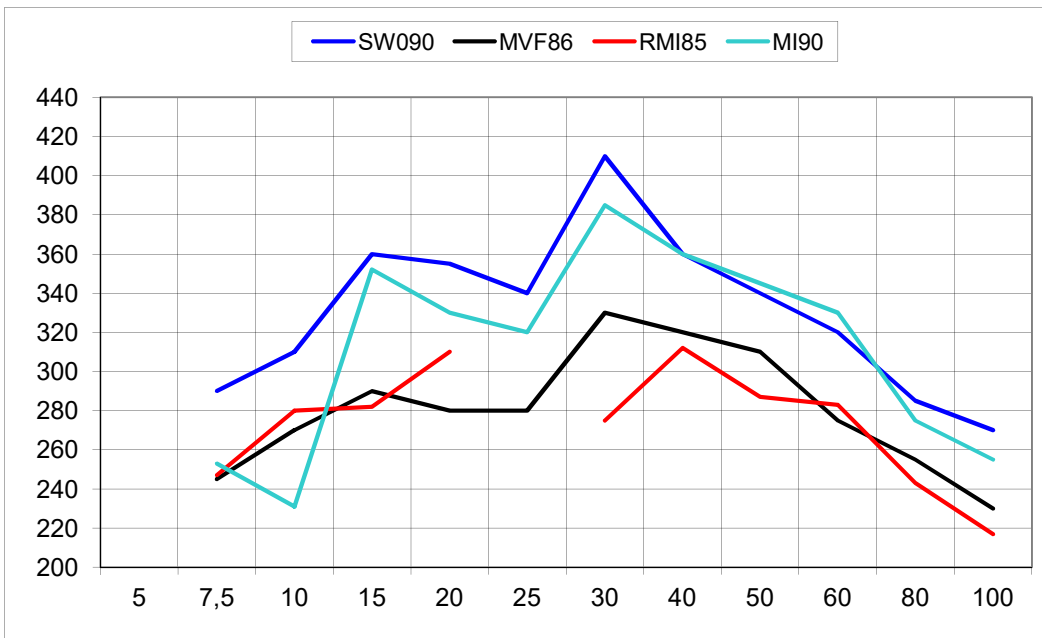

**CARATTERISTICHE**

|                  | SW090     | MVF86     | RMI85     | MI90      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 8180      | 6000      | 5800      | 6860      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | Al        | Al+G      | G         | G         |
| Peso (Kg)        | 13        | 16,3      | 19        |           |

# MOTORIDUTTORI A VITE ST / BONFIGLIOLI / STM / SITI

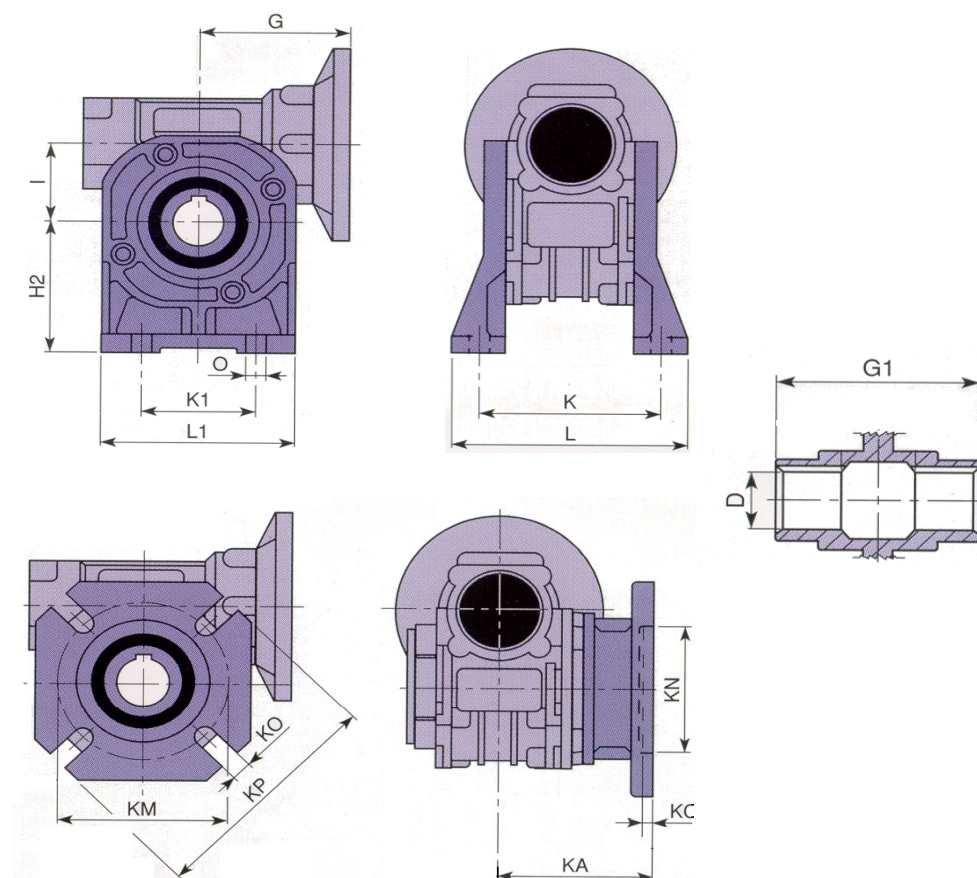

## DIMENSIONI


|          |          | SW090  |     |     |      | MVF86 |     | RMI85  |     |      |     | MI90 |         |       |
|----------|----------|--------|-----|-----|------|-------|-----|--------|-----|------|-----|------|---------|-------|
| I        |          | 90     |     |     |      | 86,9  |     | 85     |     |      |     | 90   |         | PIEDE |
| D        |          | 35(38) |     |     |      | 35    |     | 35(32) |     |      |     | 38   |         |       |
| G1       |          | 140    |     |     |      | 140   |     | 122    |     |      |     | 150  |         |       |
| G        |          | 129,5  |     |     |      | 126   |     | 118    |     |      |     | 128  |         |       |
| H2       | 142      | 150    |     |     | 142  |       | 135 |        |     |      | 150 |      |         |       |
| K        | 146(140) | 164    |     |     | 146  |       | 140 |        |     |      | 164 |      |         |       |
| K1       | 140      | 160    |     |     | 140  |       | 140 |        |     |      | 160 |      |         |       |
| O        | 11(13)   | 13     |     |     | 10,5 |       | 13  |        |     |      | 13  |      |         |       |
| L        | 180      | 195    |     |     | 186  |       | 168 |        |     |      | 198 |      |         |       |
| L1       | 200      | 210    |     |     | 220  |       | 193 |        |     |      | 210 |      | FLANGIA |       |
| KA       | 111      | 110    | 122 | 151 | 111  | 151   | 100 | 141    | 120 | 91   | 127 | 115  |         |       |
| KN       | 152      | 130    | 180 | 152 | 152  | 152   | 130 | 130    | 152 | 110  | 180 | 130  |         |       |
| KM       | 175      | 165    | 215 | 175 | 176  | 176   | 165 | 165    | 176 | 130  | 215 | 165  |         |       |
| KP       | 210      | 200    | 250 | 210 | 210  | 210   | 200 | 200    | 210 | 160  | 250 | 200  |         |       |
| KO       | 14       | 11     | 14  | 14  | 14   | 14    | 13  | 13     | 13  | 11,5 | 14  | 11   |         |       |
| KC       | 6        | 5      | 6   | 6   | 6    | 6     | 5   | 6      | 5   | 5    | 5   | 5    |         |       |
| KA-1/2G1 |          | 41     | 40  | 52  | 81   | 41    | 81  | 39     | 80  | 59   | 30  | 52   | 40      |       |
|          |          | FA     | FB  | FC  | FD   | FA    | FL  | F1     | F2  | F3   | F   | FBR  |         |       |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW090 | MVF86 | RMI85 | MI80 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 290   | 245   | 247   | 195  |
| 10  | 310   | 270   | 280   | 174  |
| 15  | 360   | 290   | 282   | 253  |
| 20  | 355   | 280   | 310   | 231  |
| 25  | 340   | 280   |       | 220  |
| 30  | 410   | 330   | 275   | 286  |
| 40  | 360   | 320   | 312   | 264  |
| 50  | 340   | 310   | 287   | 224  |
| 60  | 320   | 275   | 283   | 220  |
| 80  | 285   | 255   | 243   | 214  |
| 100 | 270   | 230   | 217   | 189  |

**POTENZA IN ENTRATA (kW - 1400)**


| i   | SW090 | MVF86 | RMI85 | MI80 |
|-----|-------|-------|-------|------|
| 5   |       |       |       |      |
| 7,5 | 4,8   | 4     | 4     | 3    |
| 10  | 4,8   | 4     | 4     | 3    |
| 15  | 4,8   | 3     | 4     | 3    |
| 20  | 4     | 2,2   | 3     | 2,2  |
| 25  | 3     | 2,2   |       | 1,5  |
| 30  | 3     | 2,2   | 2,2   | 1,8  |
| 40  | 1,8   | 1,5   | 1,8   | 1,1  |
| 50  | 1,8   | 1,5   | 1,5   | 0,75 |
| 60  | 1,5   | 1,1   | 1,1   | 0,75 |
| 80  | 0,92  | 0,75  | 0,75  | 0,75 |
| 100 | 0,75  | 0,55  | 0,75  | 0,55 |

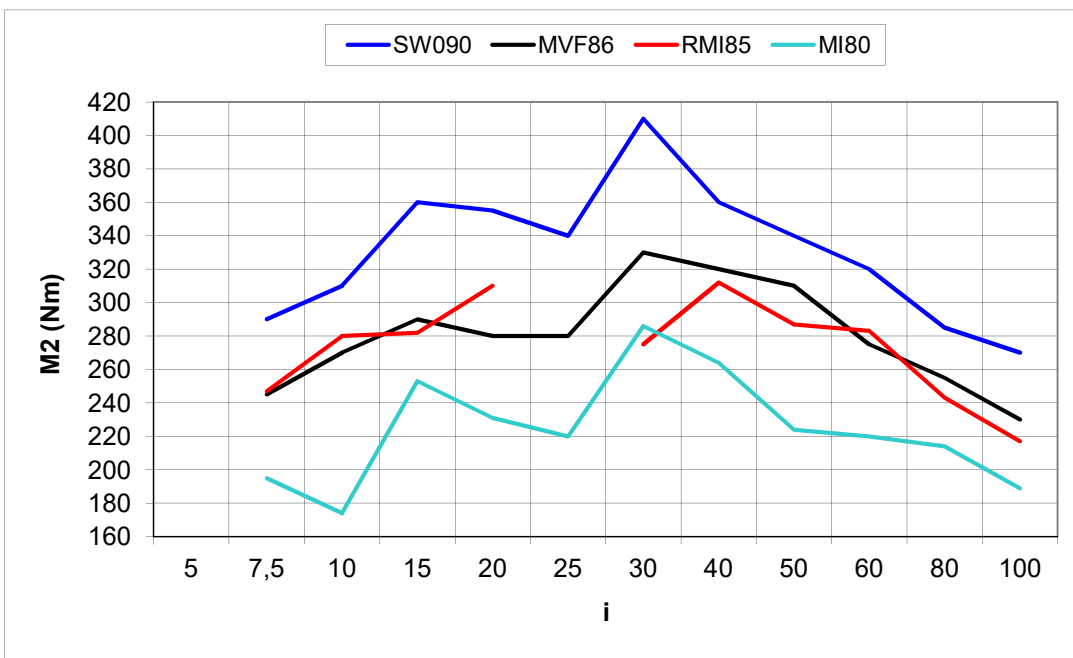

**CARATTERISTICHE**

|                  | SW090     | MVF86     | RMI85     | MI80      |
|------------------|-----------|-----------|-----------|-----------|
| Radiale max. (N) | 8180      | 6000      | 5800      | 5920      |
| Lubrificazione   | sintetico | sintetico | sintetico | sintetico |
| Mat. cassa       | Al        | Al+G      | G         | G         |
| Peso (Kg)        | 13        | 16,3      | 19        |           |

**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

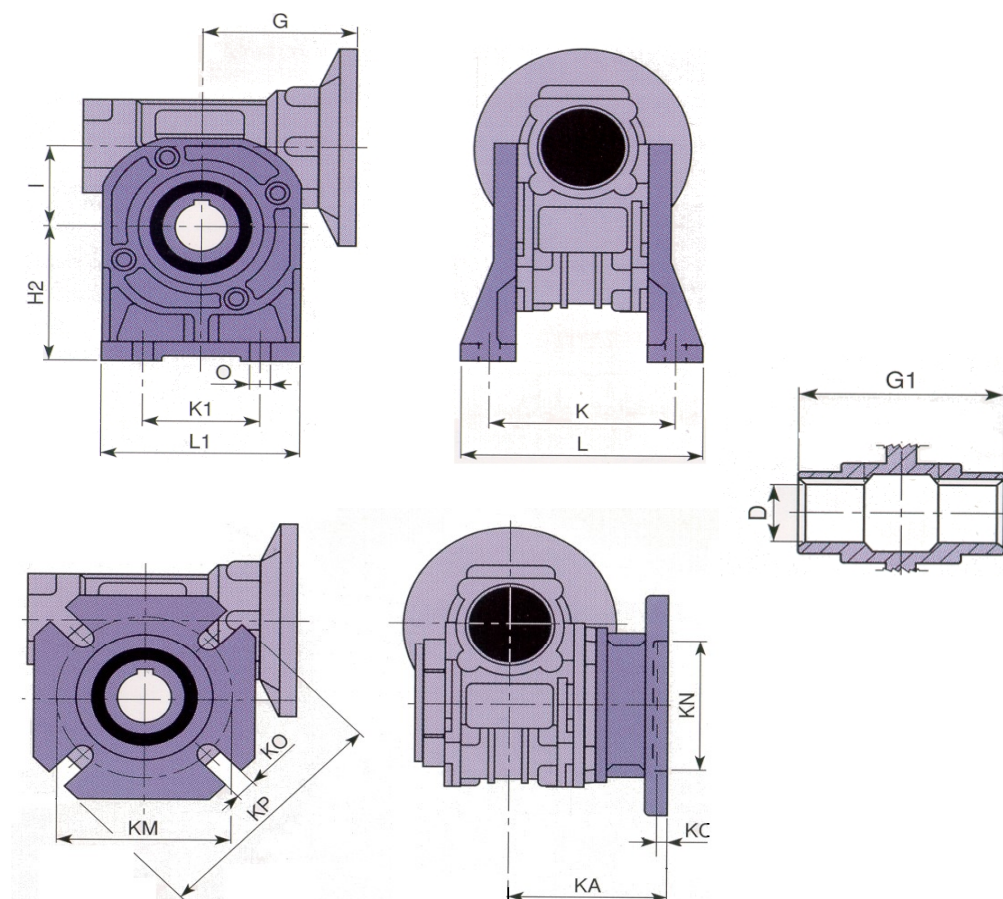

**DIMENSIONI**


|          | SW090    |     |     | MVF86 |     | RMI85  |     |     |      | MI80 |      |  |
|----------|----------|-----|-----|-------|-----|--------|-----|-----|------|------|------|--|
| I        | 90       |     |     | 86,9  |     | 85     |     |     |      | 80   |      |  |
| D        | 35(38)   |     |     | 35    |     | 35(32) |     |     |      | 35   |      |  |
| G1       | 140      |     |     | 140   |     | 122    |     |     |      | 140  |      |  |
| G        | 129,5    |     |     | 126   |     | 118    |     |     |      | 108  |      |  |
| H2       | 142      |     |     | 142   |     | 135    |     |     |      | 142  |      |  |
| K        | 146(140) |     |     | 164   |     | 140    |     |     |      | 147  |      |  |
| K1       | 140      |     |     | 160   |     | 140    |     |     |      | 140  |      |  |
| O        | 11(13)   |     |     | 13    |     | 13     |     |     |      | 11   |      |  |
| L        | 180      |     |     | 195   |     | 168    |     |     |      | 181  |      |  |
| L1       | 200      |     |     | 210   |     | 193    |     |     |      | 180  |      |  |
| KA       | 111      | 110 | 122 | 111   | 151 | 100    | 141 | 120 | 91   | 120  | 100  |  |
| KN       | 152      | 130 | 180 | 152   | 152 | 130    | 130 | 152 | 110  | 130  | 110  |  |
| KM       | 175      | 165 | 215 | 176   | 176 | 165    | 165 | 176 | 130  | 165  | 130  |  |
| KP       | 210      | 200 | 250 | 210   | 210 | 200    | 200 | 210 | 160  | 200  | 160  |  |
| KO       | 14       | 11  | 14  | 14    | 14  | 13     | 13  | 13  | 11,5 | 11,5 | 11,5 |  |
| KC       | 6        | 5   | 6   | 6     | 6   | 5      | 6   | 5   | 5    | 5    | 5    |  |
| KA-1/2G1 | 41       | 40  | 52  | 41    | 81  | 39     | 80  | 59  | 30   | 50   | 30   |  |
|          | NEW      |     |     | F     | FA  | FL     | F1  | F2  | F3   | F    | FBR  |  |

**PRESTAZIONI NOMINALI (Nm) con n1=1400**

| i   | SW105 | MVF110 | RMI110 | MI110 |
|-----|-------|--------|--------|-------|
| 5   |       |        |        |       |
| 7,5 | 480   | 460    | 478    | 400   |
| 10  | 520   | 500    | 537    | 450   |
| 15  | 570   | 550    | 535    | 540   |
| 20  | 560   | 520    | 617    | 440   |
| 25  | 590   | 490    |        | 470   |
| 30  | 630   | 620    | 570    | 610   |
| 40  | 610   | 610    | 638    | 600   |
| 50  | 600   | 570    | 581    | 550   |
| 60  | 560   | 510    | 465    | 530   |
| 80  | 490   | 470    | 491    | 450   |
| 100 | 460   | 460    | 444    | 400   |


**POTENZA IN ENTRATA (kW - 1400)**

| i   | SW105 | MVF110 | RMI110 | MI110 |
|-----|-------|--------|--------|-------|
| 5   |       |        |        |       |
| 7,5 | 7,5   | 4      | 4      | 4     |
| 10  | 7,5   | 4      | 4      | 4     |
| 15  | 7,5   | 4      | 4      | 4     |
| 20  | 5,5   | 4      | 4      | 4     |
| 25  | 4,8   | 4      |        | 3     |
| 30  | 4     | 4      | 4      | 3     |
| 40  | 3     | 3      | 4      | 3     |
| 50  | 3     | 2,2    | 3      | 2,2   |
| 60  | 2,2   | 1,8    | 2,2    | 1,8   |
| 80  | 1,5   | 1,5    | 1,5    | 1,5   |
| 100 | 1,1   | 0,75   | 1,1    | 1,1   |

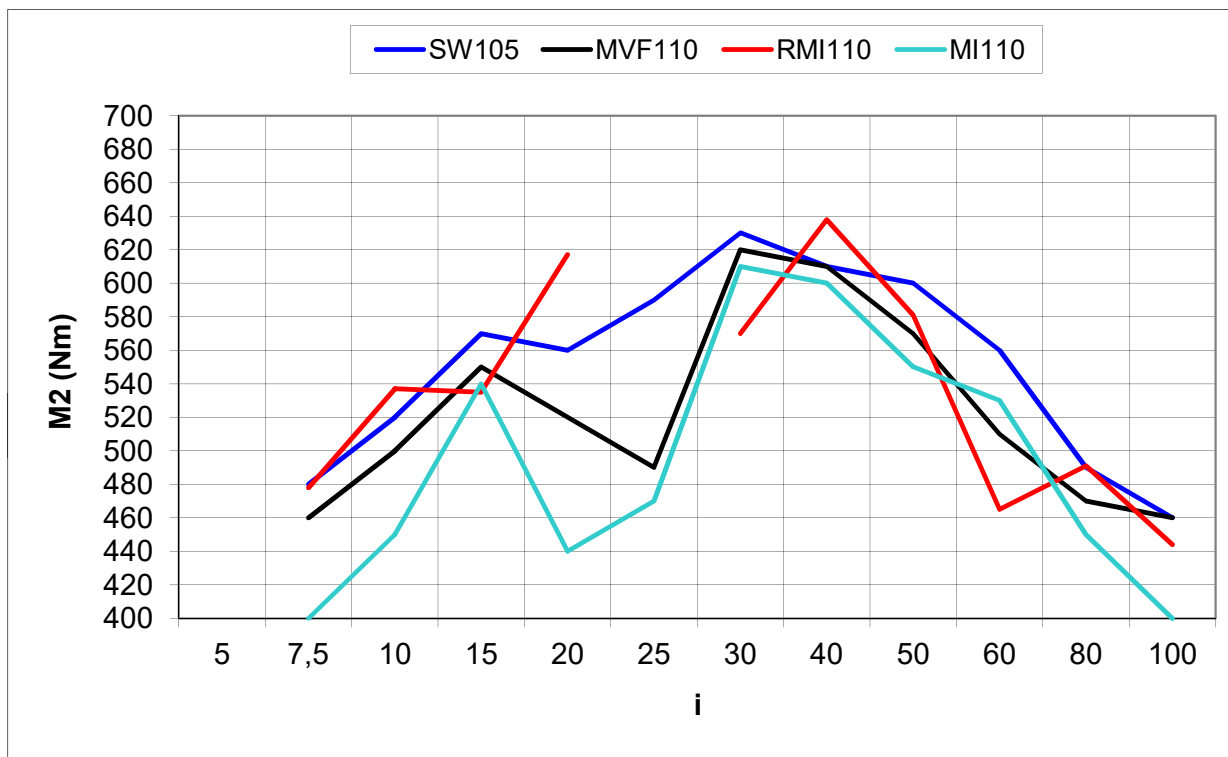

## CARATTERISTICHE

|                  | SW105     | MVF110    | RMI110   | MI110 |
|------------------|-----------|-----------|----------|-------|
| Radiale max. (N) | 8180      | 7350      | 8250     | 7570  |
| Lubrificazione   | sintetico | sintetico | minerale | vuoto |
| Mat. cassa       | All       | All+G     | G        |       |
| Peso (Kg)        |           | 32        | 38       |       |

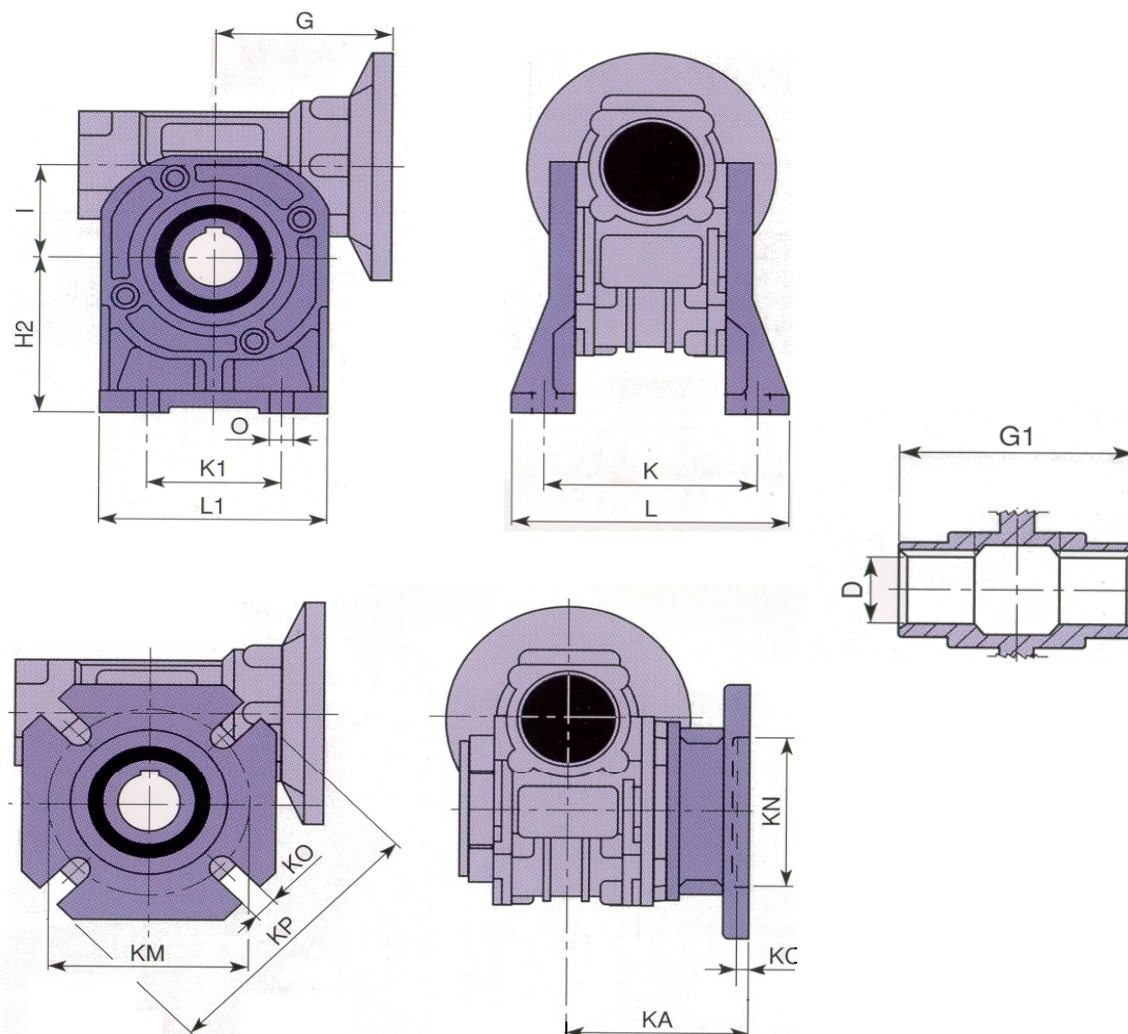**MOTORIDUTTORI A VITE**  
**ST / BONFIGLIOLI / STM / SITI**

**DIMENSIONI**

|          | SW105   |       | MVF110 |       | RMI110 |      |      |       | MI110 |      |
|----------|---------|-------|--------|-------|--------|------|------|-------|-------|------|
| I        | 110     |       | 110,1  |       | 110    |      |      |       | 110   |      |
| D        | 42      |       | 42     |       | 42     |      |      |       | 42    |      |
| G1       | 155     |       | 155    |       | 155    |      |      |       | 155   |      |
| G        | 160     |       | 153    |       | 145    |      |      |       | 149   |      |
| H2       | 172/170 |       | 170    |       | 172    |      |      |       | 172   |      |
| K        | 181/160 |       | 181    |       | 162    |      |      |       | 160   |      |
| K1       | 200     |       | 200    |       | 200    |      |      |       | 200   |      |
| O        | 13      |       | 12,5   |       | 14     |      |      |       | 13    |      |
| L        | 215     |       | 220    |       | 200    |      |      |       | 190   |      |
| L1       | 250     |       | 270    |       | 250    |      |      |       | 250   |      |
| KA       | 131     | 180   | 131,5  | 179,5 | 150    | 115  | 132  | 178   | 150   | 130  |
| KN       | 170     | 170   | 170    | 170   | 180    | 130  | 170  | 170   | 180   | 170  |
| KM       | 230     | 230   | 230    | 230   | 215    | 165  | 230  | 230   | 215   | 215  |
| KP       | 280     | 280   | 280    | 280   | 250    | 200  | 270  | 270   | 250   | 250  |
| KO       | 14      | 14    | 13,5   | 13,5  | 15     | 13   | 13,5 | 13,5  | 15    | 15   |
| KC       | 6       | 6     | 5      | 18    | 5      | 5    | 10   | 10    | 5     | 5    |
| KA-1/2G1 | 53,5    | 102,5 | 54     | 102   | 72,5   | 37,5 | 54,5 | 100,5 | 72,5  | 52,5 |
|          | FA      | FB    | FC     | F     | FL     | F1   | F2   | F3    | F     | FBR  |